

Customized Diamond Grinding Wheel


HD Diamond Scribing Wheel Application Case

- Applied to cutting of OGS, STN, TP, Panel, and ITO conductive glass;
- Applied to cutting of decorative mirrors (bathroom mirrors), makeup mirrors, architectural glass, automobile glass, rearview mirrors;
- Applied to cutting of transparent glass of watches, microscopes, eyeglasses, and etc.



Glass Thickness	Specification Recommended	Angle Range
2-4mm	4.2*1.4*1.1*θ°	130°≤θ≤135°
4-6mm	4.2*1.4*1.1*θ°	135°≤θ≤145°
6-8mm	5.6*1.4*1.1*θ°	145°≤θ≤150°
8-15mm	5.6*1.4*1.1*θ°	150°≤θ≤160°

Remark: Customized products are also available.

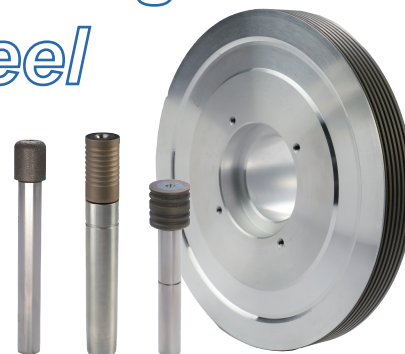


Tel: +86-0573-82750575 +86-0573-82765885
 Mobile: +86-13910939562 +86-18610534169
 Fax: +86-10-58411388-8103
 E-mail: marketing@worldiatools.com
 Web: www.worldiatools.com www.worldia-tools.com
 Headquarter Address:
 Room H-02, 5F, M7 Building, No.1 Jiuxianqiao East Road, Chaoyang District, Beijing
 Province 100015, China
 Factory Address(No.1):
 No.2 Industry Road, Dachang Chaobaihe Industrial Park, Langfang City, Hebei
 Province 065300, China
 Factory Address(No.2):
 No. 1136 Bazi Road, Xiuzhou District, Jiaxing City, Zhejiang Province 314000, China




WORLDIA


BEIJING WORLDIA DIAMOND TOOLS CO.,LTD.

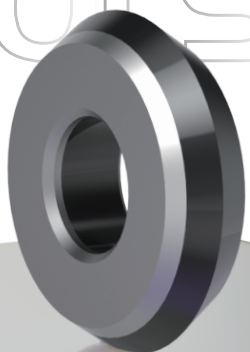

HD Diamond Scribing Wheel

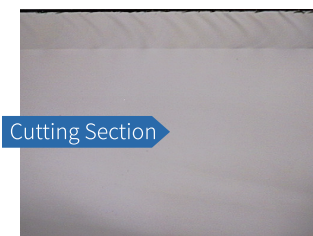

Cutting Section




Scribing Line

Feature

- The hardness of HD diamond scribing wheel is as high as 9000-10000HV, and the cutting edge is relatively sharp. It has the characteristics of good cutting line continuity, vertical section and strong penetration.
- The HD diamond scribing wheel can keep the glass cutting section with high flatness, which effectively reduces the grinding cost.
- The cutting edge is processed by a special technology, which helps to avoid the accidents of slipping during the high-speed rotation and result in the lower frequency of quality abnormality in the cutting process.
- Compared with diamond toothed scribing wheels, HD scribing wheel is relatively low in cost. Because of the excellent wear resistance, the service life is much higher than that of ordinary carbide cutting wheels. Therefore, it owns higher quality and lower cost performance, and can be positioned in the market to the intermediate product between carbide scribing wheel and diamond toothed.

Diamond Axle




Diamond Axle is made of PCD polycrystalline diamond, with the characteristics of high hardness and wear resistance, suitable for the use of diamond scribing wheel and HD scribing wheel.

Precised Holders



The holder is made of zinc-aluminum alloy. Compared with the traditional plastic holder, the zinc-aluminum alloy holder has the characteristics of high hardness, wear resistance, good cutting stability and stable cutting quality. It is suggested to use it with diamond axle.

DIAMOND SCRIBING WHEEL

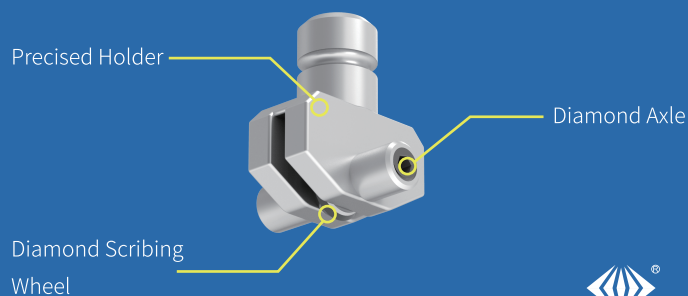

HD Diamond Scribing Wheel Selection Table

Type	HDY-1/HDY-2/HDY-3 (Edge Sharpness Rate: 1-Fine 2-Medium 3-Rough)	
Specification	OD*ID*Thickness*Angle	
OD(mm)	4.2	5.6
ID(mm)	1.4	1.4
Thickness(mm)	1.1	1.1
Angle(°)	125°-160°	

Diamond Axle Application Case

Type	HDZ	
Specification	Diameter*Length	
Diameter(mm)	1.3	1.4
Length(mm)	4.0	4.2

Precised Holders Selection Table

Holder Series	Type
HDXL Series	HDXL-1

We manufacture more than 400 kinds of holders and standardized holder base and also support non-standard customized products!